

## **Features and Benefits:**

- Dual-head design enhances usability and adds flexibility
- USB-HID or USB Keyboard interface
- Reads up to three tracks of information, bidirectionally
- Compact size for use in many applications
- User-friendly configuration software utility
- Signifies successful reads with a beeper and LED indicator
- Can be used free-standing or mounted
- Reliable for a minimum of one million cycles

# **MiniMag**<sup>™</sup> **Duo**

Compact Dual-Headed MagStripe Swipe Reader

#### **Convenience and Compact Size**


The unique dual-head design provides the most convenience to the user and ensures the data is captured on every swipe. It reads three tracks of magnetic stripe card data regardless of swiping direction and over a large speed range. The MiniMag™ Duo delivers exceptional performance in a compact 90mm solution.

#### **Full Functionality and Flexibility**

Available in USB Keyboard and USB-HID interfaces, the MiniMag™ Duo offers one of the smallest form factors for the industry. The MiniMag™ Duo is a strong fit for kiosk applications as well as POS, loyalty, and hospitality applications. The MiniMag™ Duo provides embedded metal threaded inserts in its base to allow the reader to be mounted.

#### **Configurability and Reliability**

The MiniMag™ Duo is programmable so that the data format and intelligent interface output can be programmed and configured to match application and communication requirements. Data output format can be customized with ID TECH's Windows-based MagSwipe Configuration Utility. The MiniMag™ Duo ensures over one million card cycles and is one of the industries most reliable card readers.

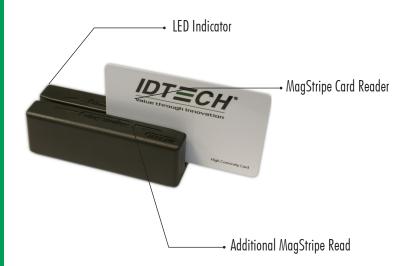



## MiniMag

## **Specifications IDMB-3XXXXX**

#### **Electrical**

Power Requirements: +5 VDC from USB port

40mA maximum

Interfaces: USB Keyboard, USB-HID Card Speed: 5 to 65 ips (7.6 to 165 cm/s)

Certifications: CE & FCC Class A

#### **Environmental**

Operating Temperature: 32° F to 131° F (0° C to 55° C) Storage Temperature: -22° F to 158° F (-30° C to 70° C) Humidity: Maximum 95% non-condensing, dry storage

### **Reliability**

Operating Life: 1,000,000 cycles minimum Warranty: One year, parts and labor

#### Mechanical

Dimension (L)x(W)x(H): 3.54 inches (90 mm) x 1.34 inches (34 mm) x 1.10 inches (28 mm)

Media Thickness: 0.005 inches (0.127 mm) to 0.045 inches (1.14 mm)

ISO 7811, AAMVA, and other F2F formats Media Formats:

Slot Width: 0.040 inches (1.37 mm)

Swipe Speed: 3 to 60 inches per second, bidirectional

Weight: 4.6 oz.

Indicators: Tricolored LED and beeper

Cable Length: 6-foot side exit cable (bottom exit is an option)

Cable Connector: USB Type-A

**United States Sales Office** 

10721 Walker Street Cypress, CA 90630 Phone: (714) 761-6368 Toll Free: (800) 984-1010 (714) 761-8880 sales@idtechproducts.com

**Corporate Headquarters** 

#### International Sales Offices

+866-3-496-6988 (Taiwan) asia@idtechproducts.com.tw

#### Canada

+450-465-5261robertop@idtechproducts.com

#### **South America**

+55-11-3079-2255internationalsales@idtechproducts.com

+011441925269550emea@idtechproducts.com

ISO 9001 Certified

